


Belt Alignment Switches for Explosive Environments

HLM-CBA-EX STANDARD DUTY DIE-CAST



Ex Exd IIC T6 (-20 ≤ Ta ≤ +60C) Gb **Ex** Ex tb IIIC T85C (-20 ≤ Ta ≤ +60C) Db Zones 1, 21, 2, 22 Gas and Dust

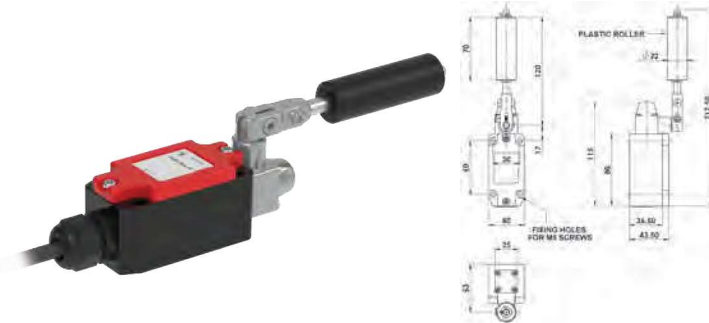


SALES NUMBER	TYPE	PRE-WIRED	CONTACTS	ROLLER TYPE
174413	HLM-CBA-EX	3m 4 core	1NC 1NO	PLASTIC
174463	HLM-CBA-EX	3m 4 core	1NC 1NO	S/STEEL
174414	HLM-CBA-EX	3m 4 core	2NC	PLASTIC
174464	HLM-CBA-EX	3m 4 core	2NC	S/STEEL
174415	HLM-CBA-EX	3m 8 core	2NC / 2NO	PLASTIC
174465	HLM-CBA-EX	3m 8 core	2NC / 2NO	S/STEEL

Longer cable lengths available on request.

HLM-SS-CBA-EX STANDARD DUTY STAINLESS STEEL 316



Ex Exd IIC T6 (-20 ≤ Ta ≤ +60C) Gb **Ex** Ex tb IIIC T85C (-20 ≤ Ta ≤ +60C) Db Zones 1, 21, 2, 22 Gas and Dust

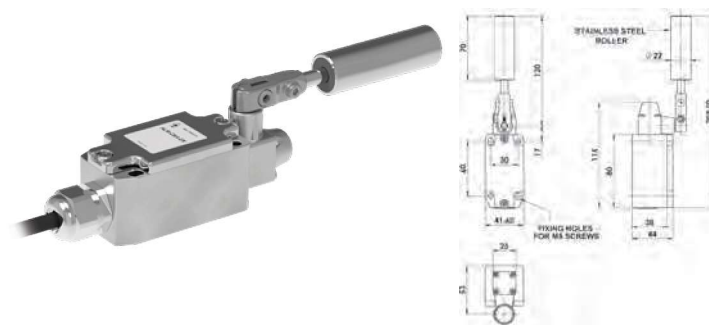


SALES NUMBER	TYPE	PRE-WIRED	CONTACTS	ROLLER TYPE
175413	HLM-SS-CBA-EX	3m 4 core	1NC 1NO	PLASTIC
175463	HLM-SS-CBA-EX	3m 4 core	1NC 1NO	S/STEEL
175414	HLM-SS-CBA-EX	3m 4 core	2NC	PLASTIC
175464	HLM-SS-CBA-EX	3m 4 core	2NC	S/STEEL
175415	HLM-SS-CBA-EX	3m 8 core	2NC / 2NO	PLASTIC
175465	HLM-SS-CBA-EX	3m 8 core	2NC / 2NO	S/STEEL

Longer cable lengths available on request.

PYTHON BELT SWITCH HEAVY DUTY DIE-CAST



Ex Exd IIC T6 (-20 ≤ Ta ≤ +60C) Gb **Ex** Ex tb IIIC T85C (-20 ≤ Ta ≤ +60C) Db Zones 1, 21, 2, 22 Gas and Dust

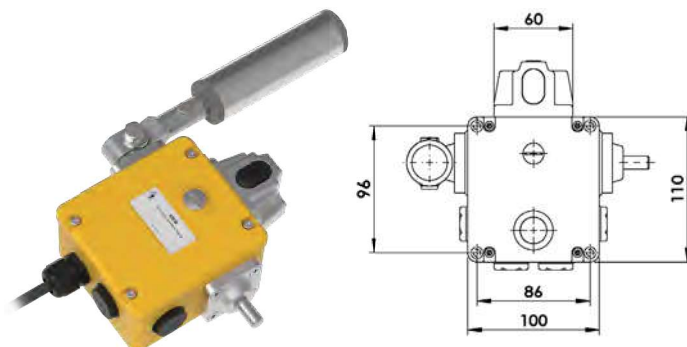

SALES NUMBER	TYPE	PRE-WIRED	CONTACTS	ROLLER SIZE
500051	Python Belt Switch	3m 8 core	2NC 2NO	35mm Long
500021	Python Belt Switch	3m 8 core	2NC 2NO	35mm Short
500091	Python Belt Switch	3m 8 core	2NC 2NO	50mm


Longer cable lengths available on request.

- Dual signal (WARNING + STOP)
- Operational torque can be adjusted
- 3 Roller sizes for heavy-duty performance

PYTHON BELT SWITCH HEAVY DUTY STAINLESS STEEL 316



Ex Exd IIC T6 (-20 ≤ Ta ≤ +60C) Gb **Ex** Ex tb IIIC T85C (-20 ≤ Ta ≤ +60C) Db Zones 1, 21, 2, 22 Gas and Dust

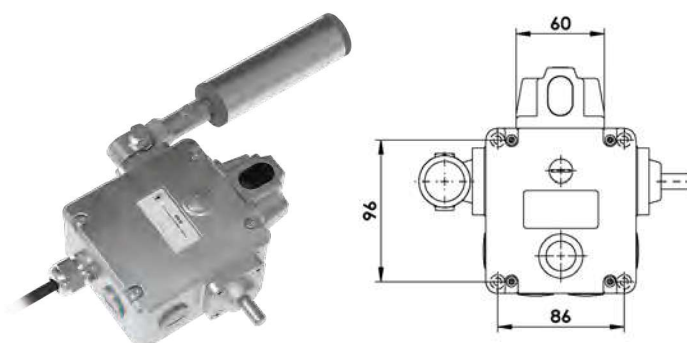

SALES NUMBER	TYPE	PRE-WIRED	CONTACTS	ROLLER SIZE
501051	Python Belt Switch	3m 8 core	2NC 2NO	35mm Long
501021	Python Belt Switch	3m 8 core	2NC 2NO	35mm Short
501091	Python Belt Switch	3m 8 core	2NC 2NO	50mm

Longer cable lengths available on request.

- Dual signal (WARNING + STOP)
- Operational torque can be adjusted
- 3 Roller sizes for heavy-duty performance
- Stainless steel enclosure suitable for outdoor use