

Explosion Proof Non Contact Safety Interlock Switches




CM3-Ex STAINLESS STEEL 316


II 2G Ex mb IIC T6 Gb

II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

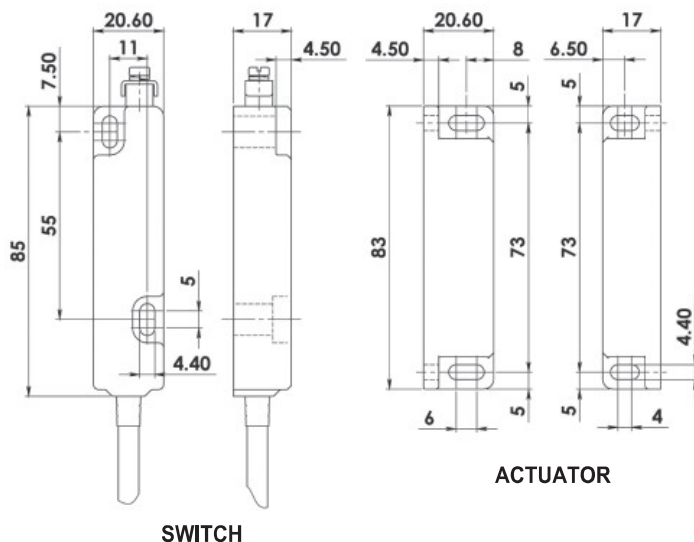

ACTUATOR

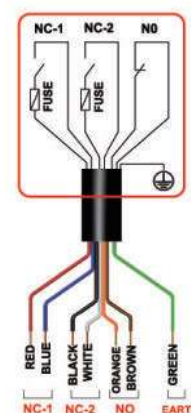


SALES NUMBER	TYPE ZONES 1,21,2,22	BODY HOUSING	CABLE LENGTH 6mm OD	CIRCUITS	ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) NC	ELECTRICAL RATING NORMALLY OPEN CIRCUITS (Actuator Present) NO
903101	CM3-Ex	S/Steel	5M	2NC 1NO	230Vac/24Vdc 0.6A Max.	230Vac/24Vdc
903102	CM3-Ex	S/Steel	10M	2NC 1NO	INTERNALLY FUSED	200mA. Max.

LM-Ex STAINLESS STEEL 316

II 2G Ex mb IIC T6 Gb


II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

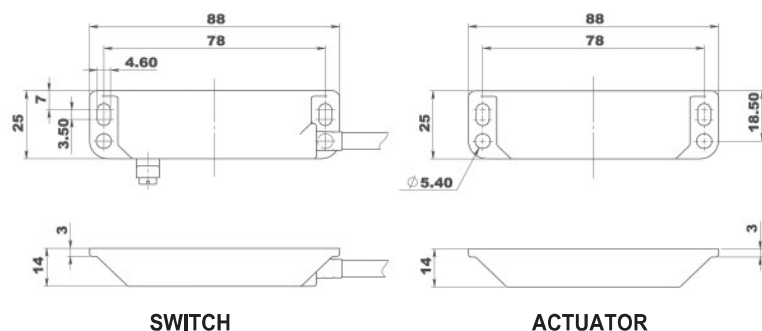

SWITCH

ACTUATOR

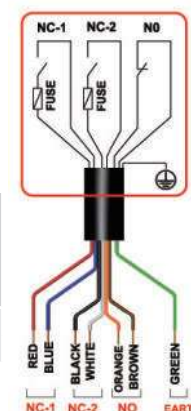

SALES NUMBER	TYPE ZONES 1,21,2,22	BODY HOUSING	CABLE LENGTH 6mm OD	CIRCUITS	ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) RED/BLUE NC1 WHITE/BLACK NC2	ELECTRICAL RATING NORMALLY OPEN CIRCUITS (Actuator Present) ORANGE/BROWN NO
904101	LM-Ex	S/Steel	5M	2NC 1NO	230Vac/24Vdc 0.6A Max.	230Vac/24Vdc
904102	LM-Ex	S/Steel	10M	2NC 1NO	INTERNALLY FUSED	200mA. Max.

*Product is fully encapsulated which is considered to provide ingress protection to at least IP67.