

Safety Limit Switches: HLM (Die-Cast)

APPLICATIONS:

IDEM's HLM range of heavy duty Die Cast Safety Limit Switches have been designed to be mounted for position sensing of moving applications e.g. guard doors, conveyors, machine beds and elevators. They are available with an extensive range of actuator heads and can be supplied with either slow break or snap action contacts.

FEATURES:

- Heavy duty die cast bodies (painted red)
- Positive opening NC safety contact to EN60947-5-1
- High mechanical life over 5,000,000 cycles
- Industry standard mounting to EN50041
- Large choice of actuator heads available

OPERATION:

Operation of IDEM Safety Limit Switches is achieved by a sliding actuation of the moving object to cause deflection of the switch plungers, rollers or levers.

For safety applications it is important that the moving object does not pass completely over the switch actuators so as to either cause damage to the actuator or allow it to return to its original position.



HLM-RP



HLM-SRL



HLM-PP



HLM-AL



HLM-ARL




HLM-SL



HLM-TSL

CONTACT BLOCKS:

Contact blocks provide positively operated safety contacts to EN60947-5-1 with optional Explosion Proof versions available.

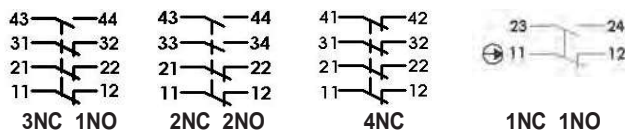


EXPLOSION PROOF MODELS ALSO AVAILABLE.
SEE MODELS/PART NUMBERS MARKED WITH EX

EX CLASSIFICATION:

- Exd IIC T6 (-20 ≤ Ta ≤ +60C) Gb
- Ex tb IIIC T85C (-20 ≤ Ta ≤ +60C) Db

QUICK CONNECT:

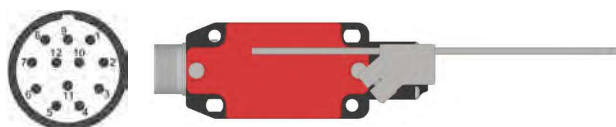

Quick Connect (QC) M23 12 Way Male (connector length 26mm) (pin view from switch)	Switch Circuit
1 3	11/12
4 6	21/22
7 8	33/34 or 31/32
9 10	41/42 or 43/44
12	Earth

TECHNICAL SPECIFICATIONS:


Standards: ISO14119 EN60947-5-1 EN60204-1
ISO13849-1 EN62061 UL 60947-5-1

Safety Classification and Reliability Data:

Mechanical Reliability B10d	2.5x10 ⁶ operations at 100mA load
ISO13849-1	Up to PLE depending upon system architecture
EN62061	Up to SIL3 depending upon system architecture
Safety Data - Annual Usage	8 cycles per hour/24 hours per day/365 days
	MTTFd 356 years
Positive Opening Operation	NC contacts
Utilisation Category	AC15 A300 240V 3A
Minimum Current	5V 5mA dc
Thermal Current (Ith)	10A
Rated Insulation Voltage	300Vac
Rated Impulse Withstand	2500Vac
Maximum Switching Speed	250mm/sec
Maximum Switching Frequency	6,000 operations per hour
Case Material	Die cast metal - painted red
Enclosure Protection	IP67
Operating Temperature	-25C to +80C
Mechanical Life Expectancy	5x10 ⁶ cycle min.
Electrical Life Expectancy	100,000 cycle min (at full load)
Vibration	IEC68-2-6 10-55Hz 0.35mm
Conductor Size	1.5mm ²
Fixing	M5 bolts


Safety Limit Switches: HLM (Die-Cast)

HLM SHORT ROLLER LEVER:

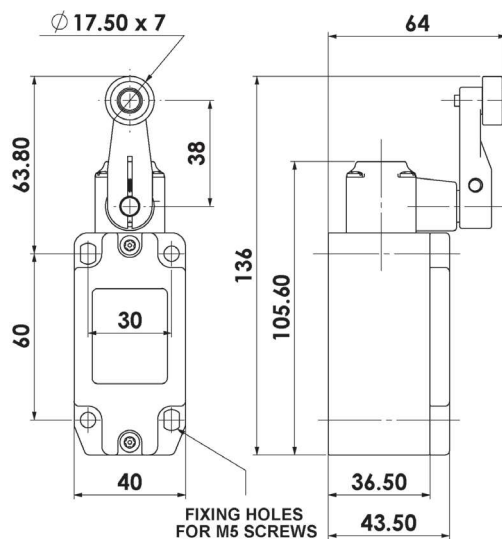


HLM SHORT ROLLER LEVER	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174001	174002	174003
3NC 1NO	174004	174005	174006
4NC	174007	174008	174009
1NC 1NO Snap	174010	174011	174012


Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174001-GC




2NC/2NO



3NC/1NO




4NC




1NC/1NO (SNAP)

HLM ROLLER PLUNGER:

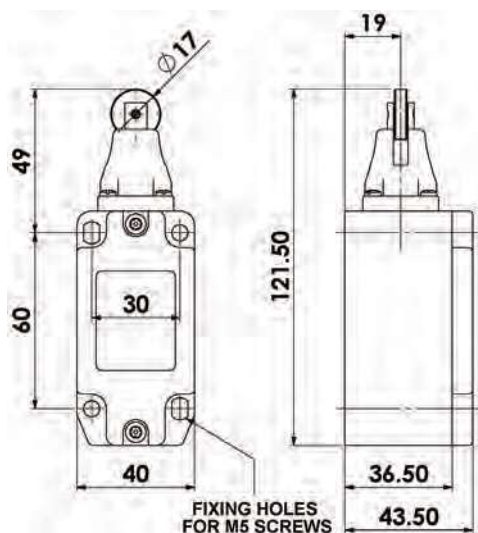


HLM ROLLER PLUNGER	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174051	174052	174053
3NC 1NO	174054	174055	174056
4NC	174057	174058	174059
1NC 1NO Snap	174060	174061	174062


Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174051-GC




2NC/2NO



3NC/1NO




4NC




1NC/1NO (SNAP)

HLM PIN PLUNGER:

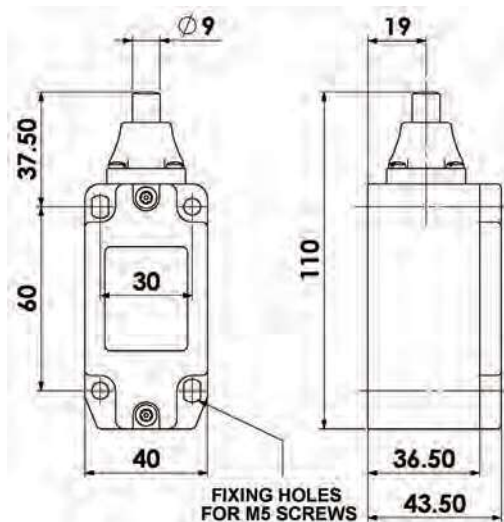


HLM PIN PLUNGER	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174101	174102	174103
3NC 1NO	174104	174105	174106
4NC	174107	174108	174109
1NC 1NO Snap	174110	174111	174112


Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174101-GC




2NC/2NO



3NC/1NO




4NC



1NC/1NO (SNAP)


Safety Limit Switches: HLM (Die-Cast)

HLM SPRING LEVER:

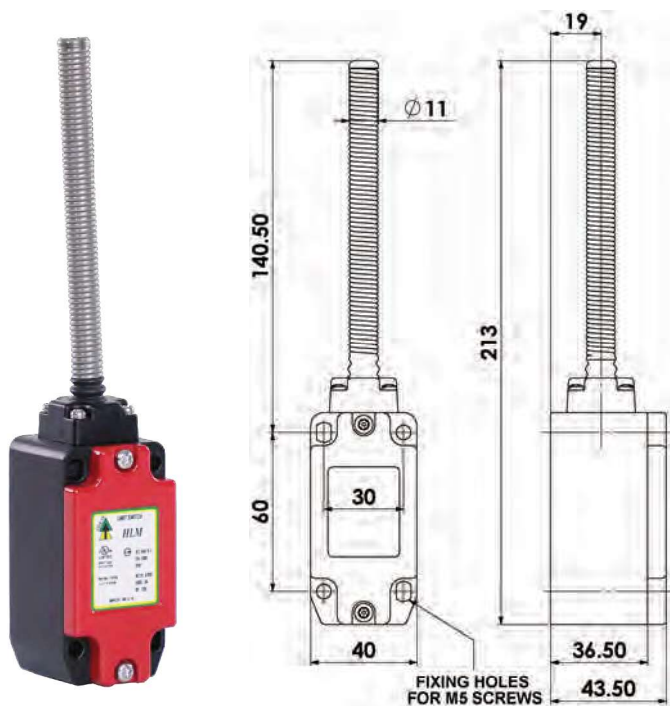


HLM SPRING LEVER	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174151	174152	174153
3NC 1NO	174154	174155	174156
4NC	174157	174158	174159
1NC 1NO Snap	174160	174161	174162

Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174151-GC

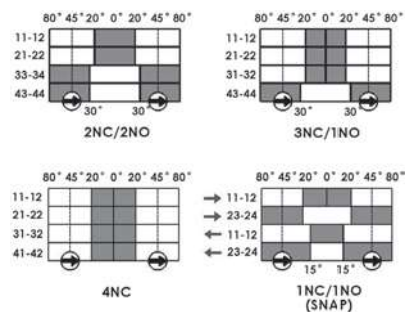


HLM TELESCOPIC SPRING LEVER:

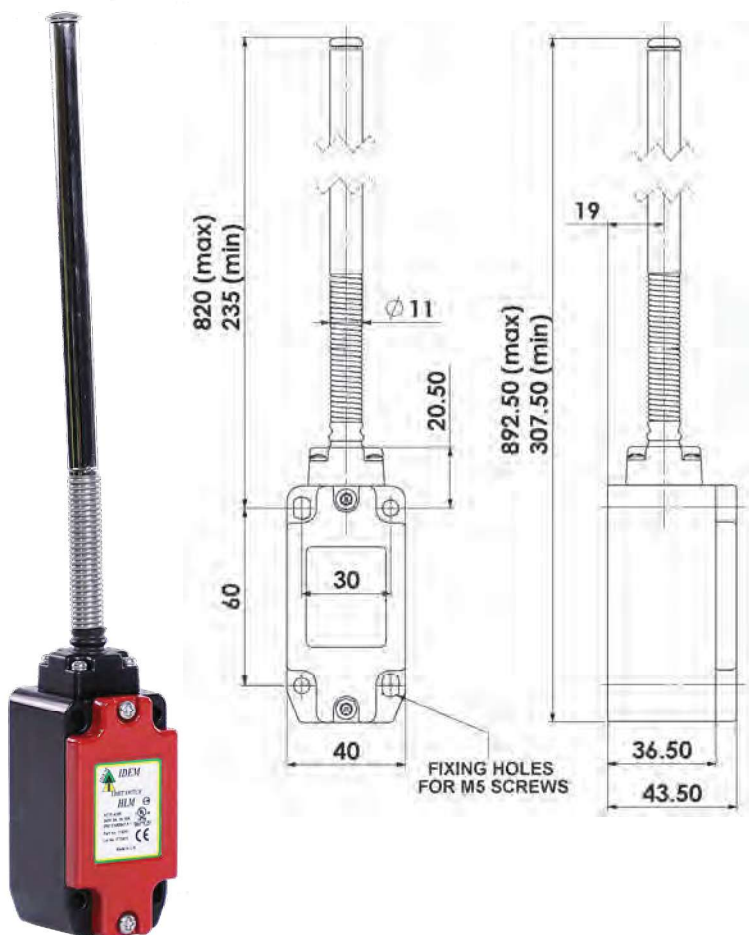


HLM TELESCOPIC SPRING LEVER	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174201	174202	174203
3NC 1NO	174204	174205	174206
4NC	174207	174208	174209
1NC 1NO Snap	174210	174211	174212

Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174201-GC

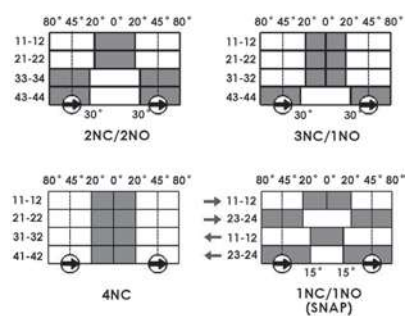


Safety Limit Switches: HLM (Die-Cast)

HLM LEVER ARM

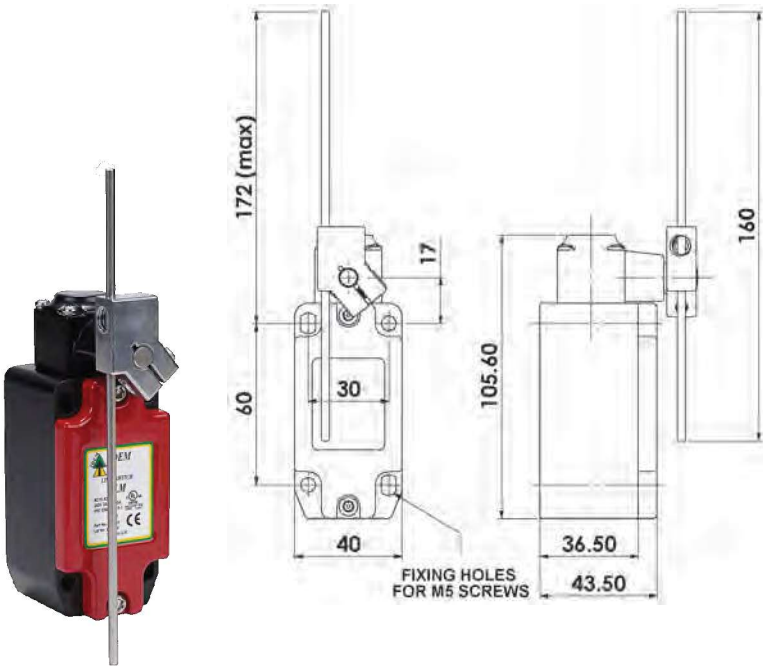


HLM LEVER ARM	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174251	174252	174253
3NC 1NO	174254	174255	174256
4NC	174257	174258	174259
1NC 1NO Snap	174260	174261	174262

Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174151-GC

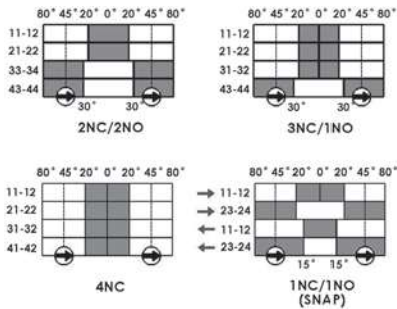

HLM ADJUSTABLE ROLLER LEVER:

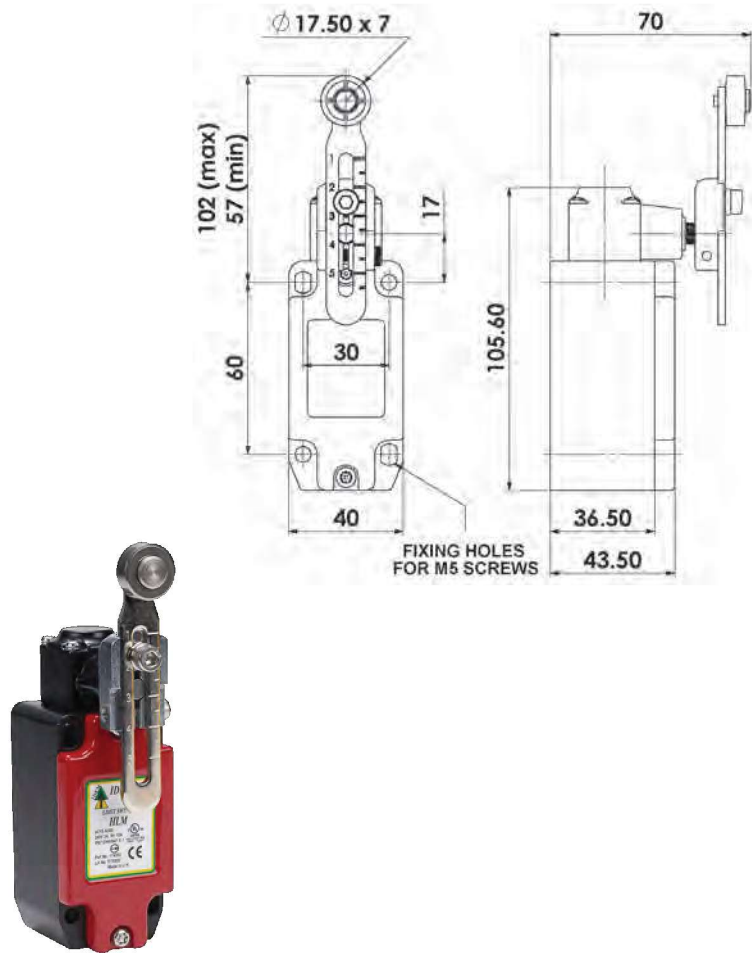

HLM ADJUSTABLE ROLLER LEVER	SALES NUMBERS		
	M20	1/2"NPT	QC M23
2NC 2NO	174301	174302	174303
3NC 1NO	174304	174305	174306
4NC	174307	174308	174309
1NC 1NO Snap	174310	174311	174312

Gold Plated Contacts available for low power circuits (5V 5mA).
Ordering: Add GC to Part Number e.g. 174201-GC

