


Magnetically Operated: SMR-H (HYGIEMAG)


FEATURES:

Robust Stainless Steel 316 enclosure designed to survive Food Processing, Packaging and Pharmaceutical applications.
Through hole fixing to enable front mounting by Hexagon head bolts:
- no food trap areas.
Suitable for CIP and SIP cleaning:
- Food Contact or Food Splash Zones EHEDG guidelines
Universal Housing - 22mm fixing hole centre with 50mm wide body.
Wide sensing at 12mm with high tolerance to misalignment.
Up to: PLe ISO13849-1.
2NC 1NO circuits.
Quick Connect versions available.

DIMENSIONS:

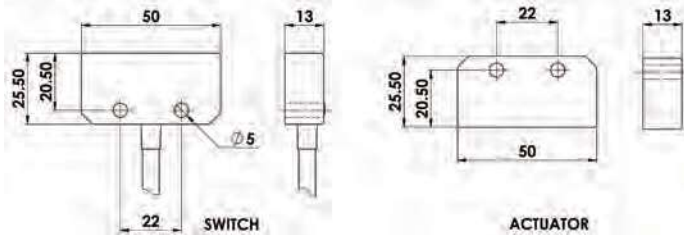

CONNECTION EXAMPLE: Magnetic Switches

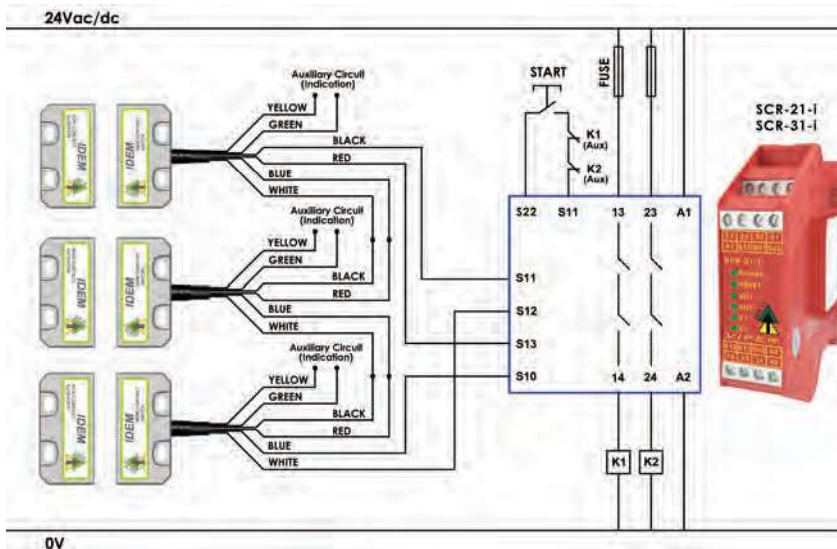

Standards: ISO14119 EN60947-5-3
EN60204-1 ISO13849-1 EN62061 UL508

Safety Classification and Reliability Data:

Mechanical Reliability B10D
ISO13849-1
Safety Data – Annual Usage
3.3 x 10⁶ operations at 100mA load
Up to PLe depending upon system architecture
8 cycles per hour/24 hours per day/365 days
MTTFd 470 years

Technical Specification:

Safety Channel 1 NC Voltage Free: 250Vac 1.0A Max. Rating
Safety Channel 2 NC Voltage Free: 250Vac 1.0A Max. Rating
Safety Channel 3 NO Voltage Free: 24Vdc 0.2A Max. Rating
Fuse Internal 1.0A (F) External 0.8A (F) (User)
Contact Release Time <2ms
Initial Contact Resistance <500 milliohm
Minimum Switched Current 10Vdc 1mA
Dielectric Withstand 250Vac
Insulation Resistance 100 Mohms
Recommended Setting Gap 5mm
Switching Distance Sao 8mm Close
(Target to Target) Sar 22mm Open
Tolerance to Misalignment 5mm in any direction from 5mm setting gap
Switching Frequency 1.0Hz maximum
Approach Speed 200mm/min to 1000mm/sec
Body Material Stainless Steel 316 mirror polished finish to Ra4
Operating Temperature -25C +105C (CIP SIP cleaning)
Enclosure Protection IP69K (QC versions IP67 for connector)
Shock Resistance IEC68-2-27 11ms 30g
Vibration Resistance IEC68-2-6 10-55Hz 1mm
Cable Type PVC 6 core 6mm OD Conductors 0.25mm²
Mounting Bolts 2xM4 Tightening torque 1.0Nm
Mounting Position Any

For all IDEM switches the normally closed (NC) circuits are closed when the guard is closed and the actuator is present.

**Stainless Steel 316 Housing mirror polished (Ra4).
Magnetic Actuation.**

Switching Tolerance up to 12mm.



Will operate with most Safety Relays.

IP69K



Use Hexagon Head Bolts for ease of cleaning.

Three switches connected to an SCR-21-i or SCR-31-i to give Dual Channel guard monitoring with monitored Manual Start and Contactor Feedback check. Auxiliary circuits provide remote signalling from each switch.



Quick Connect QC M12 8 Way Male Plug Pin view from Switch	Standard Lead Colour	Circuit (Actuator Present)
4	Yellow	NO
6	Green	NO
7	Black	NC2
1	White	NC2
2	Red	NC1
3	Blue	NC1

SALES NUMBER	TYPE	CABLE LENGTH	CIRCUITS
132009	Hygiemag SMR-H	2M	2NC
132010	Hygiemag SMR-H	5M	2NC
132011	Hygiemag SMR-H	10M	2NC
132012	Hygiemag SMR-H	QC-M12	2NC
132013	Hygiemag SMR-H	2M	2NC 1NO
132014	Hygiemag SMR-H	5M	2NC 1NO
132015	Hygiemag SMR-H	10M	2NC 1NO
132016	Hygiemag SMR-H	QC-M12	2NC 1NO



140101	Female QC Lead	M12 Female 5m. 8 way
140102	Female QC Lead	M12 Female 10m. 8 way